



Security Gate Co.

## Installation: Door Gates



Not in Use

In Use

### Mounting alternatives

All door gates can be installed in the casing of the door or on the face of the opening. Mounting on the face of the opening will leave the door opening unobstructed by the gate or the locking bar. Also the gates can be installed on the left or the right side of the door. Simply turn the gate upside down to mount on the opposite side.



### Installation Steps:



1. Stand folded gate against the doorframe where you intend to mount it.



2. Mark the mounting surface through the holes in the hinge bar with a pen or pencil.

For mounting into:

**Wood:** use 5/16 x 1-1/2" Lag Screws

**Brick or Concrete:** use 5/16 x 1-1/2" Lag Screws inserted in to 5/16" short lag shields that have been pushed into 1/2" holes

**Steel:** drill and tap for 5/16 x 1" Bolts

Installations kits, including lag screws, lag shields and padlocks are available, contact Customer Service at Security Gate Co.

3. Drill appropriate size holes in the mounting surface.






Security Gate Co.

4. Mount the gate by inserting the screws through the hinge bar.



5. Stretch the gate across the opening. Line up the locking bar on the opposite side so that the padlock hole in the gate and the padlock hole in the locking bar match.

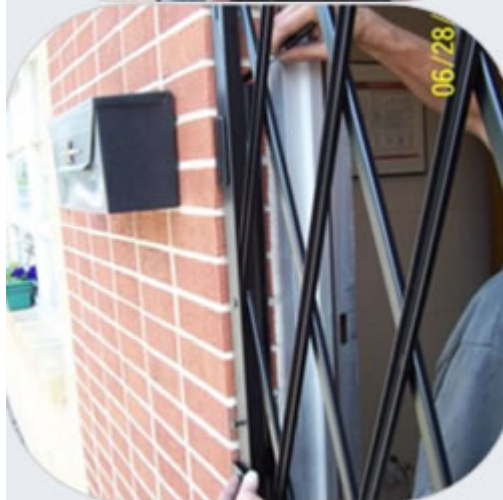

6. Mark through the mounting holes of the locking bar with a pen or pencil.



7. Drill holes and insert the screws to mount the locking bar.



Security Gate Co.

8. Pull the door into the locking bar, and insert a padlock.



**Warning:** Consult life safety codes and/or local authorities regarding proper use of this product.